

V-TEC™ Mini Personal Fall Limiter

Impressive Innovation in a Compact Size



Compact and Versatile

The V-TEC Mini PFL is the most compact and lightweight self retracting lanyard ever developed using radial energy-absorbing technology. The compact design eliminates the need for an exposed external energy-absorber outside of the housing, which improves wear and tear performance and decreases the replacement cycle, saving you money. Unit offers fall arrest and restraint for users 130 to 400 lbs. (60 to 181 kg) including tools.

Strong and Tested

The V-TEC Mini PFL has a highly durable polycarbonate, clear casing, allowing for easy pre-use inspection of critical internal components. Unit can withstand temperatures ranging from -40° to +130° F (-40° to +54° C). The V-TEC Mini PFL has been tested to these relevant standards:

- ANSI Z359.14, Class B
- OSHA 1910.66
- OSHA 1926.502
- CSA Z259.2.2-98
- EN360: 2002

WE KNOW WHAT'S AT STAKE.

V-TEC Mini PFL



Assured Safety

The world's first self retracting lifeline with multiple spring radial energy-absorbing technology

- Integral energy absorber
- Energy absorber is completely sealed from external contaminants



Free range of motion

Fully rotating attachment point for complete flexibility—both 360° and 180°



Highly durable

Polycarbonate case houses SRL; transparency allows for easy visual inspection of critical internal components



Precision engineering

Structurally reinforced pawl mechanism




Superior materials


Components manufactured from high-grade stainless steel and engineered plastics




Single-leg

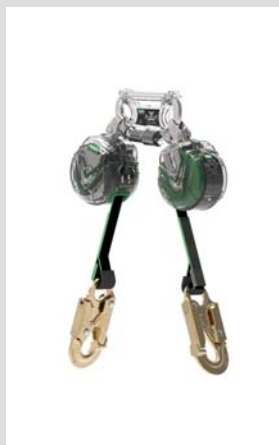

Twin-leg

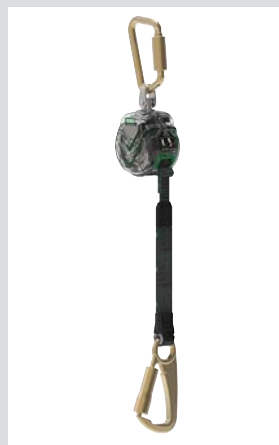


Single-leg Tie-back

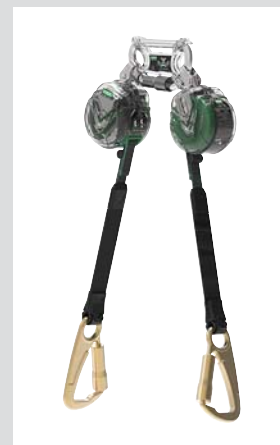

Twin-leg Tie-back

Available Connectors

V-TEC Mini PFL offers choice of steel or aluminum top carabiner and variety of available connectors.

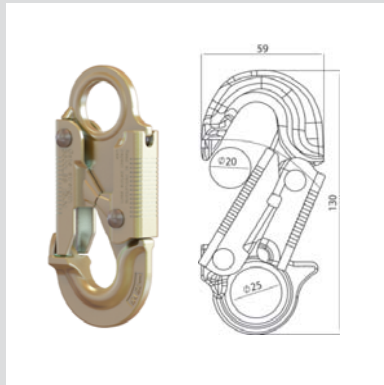

Forged Steel Snaphook (36C)

- Double-action/self-locking gate
- High-tensile steel material
- Zinc-plated finish
- EN-, ANSI- and CSA-compliant



Carabiner/Hook

- Triple-locking gate
- Aluminum alloy
- EN-, ANSI- and CSA-compliant




Aluminum Scaffold Hook (AL36CL)

- Aluminum alloy
- EN-, ANSI- and CSA-compliant



Forged Steel Swivel Snaphook (36CS)

- Double-action/self-locking gate
- High-tensile steel material
- Zinc-plated finish
- ANSI-, CSA- and EN-compliant

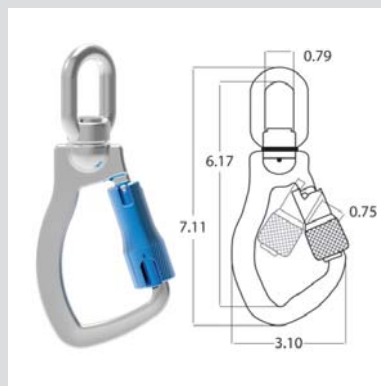

Swivel Carabiner/Hook

- Triple-locking gate
- Aluminum alloy
- ANSI-, CSA- and EN-compliant



Steel Scaffold Hook (36CL)

- High-tensile steel material
- Zinc-plated finish
- ANSI-, CSA- and EN-compliant

Ordering Information

| Part Number | Type | | | Line Length | Anchorage Connection | Harness Connection | Standards | | |
|-------------|------------|----------|----------|---------------|------------------------------------|---------------------|-----------|------|-----|
| | Single-leg | Twin-leg | Tie-back | | | | OSHA | ANSI | CSA |
| 63011-00A | ■ | | | 6 ft. (1.8 m) | AL36CL | Steel carabiner | ■ | ■ | ■ |
| 63011-00B | ■ | | | 6 ft. (1.8 m) | 36C | Steel carabiner | ■ | ■ | ■ |
| 63011-00C | ■ | | | 6 ft. (1.8 m) | Aluminum swivel carabiner | Steel carabiner | ■ | ■ | ■ |
| 63011-00D | ■ | | | 6 ft. (1.8 m) | Aluminum carabiner | Steel carabiner | ■ | ■ | ■ |
| 63011-00E | ■ | | | 6 ft. (1.8 m) | 36CS | Steel carabiner | ■ | ■ | ■ |
| 63011-00F | ■ | | | 6 ft. (1.8 m) | 36CL | Steel carabiner | ■ | ■ | ■ |
| 63111-00A | | ■ | | 6 ft. (1.8 m) | AL36CL (2) | Twin-Link Connector | ■ | ■ | ■ |
| 63111-00B | | ■ | | 6 ft. (1.8 m) | 36C (2) | Twin-Link Connector | ■ | ■ | ■ |
| 63111-00C | | ■ | | 6 ft. (1.8 m) | Aluminum swivel carabiner (2) | Twin-Link Connector | ■ | ■ | ■ |
| 63111-00D | | ■ | | 6 ft. (1.8 m) | Aluminum triple-lock carabiner (2) | Twin-Link Connector | ■ | ■ | ■ |
| 63111-00E | | ■ | | 6 ft. (1.8 m) | 36CS (2) | Twin-Link Connector | ■ | ■ | ■ |
| 63111-00F | | ■ | | 6 ft. (1.8 m) | 36CL (2) | Twin-Link Connector | ■ | ■ | ■ |
| 63041-00A | | | ■ | 9 ft. (2.7 m) | FP5K | Steel carabiner | ■ | | |
| 63141-00A | | | ■ | 9 ft. (2.7 m) | FP5K (2) | Twin-Link Connector | ■ | | |
| 63041-00ACA | | | ■ | 9 ft. (2.7 m) | FP5K | Steel carabiner | | | ■ |
| 63141-00ACA | | | ■ | 9 ft. (2.7 m) | FP5K (2) | Twin-Link Connector | | | ■ |

V-TEC Mini Twin-Link Connector

| Part Number | Description |
|-------------|-----------------------------------|
| 63900-04 | Twin-Link Connector for V-TEC PFL |

Twin-Link Connector



Note: This Bulletin contains only a general description of the products shown. While uses and performance capabilities are described, under no circumstances shall the products be used by untrained or unqualified individuals and not until the product instructions including any warnings or cautions provided have been thoroughly read and understood. Only they contain the complete and detailed information concerning proper use and care of these products.



MSA – The Safety Company

1000 Cranberry Woods Drive
Cranberry Township, PA 16066 USA
Phone 724-776-8600

www.MSAsafety.com

U.S. Customer Service Center

Phone 1-800-MSA-2222
Fax 1-800-967-0398

MSA Canada

Phone 1-800-672-2222
Fax 1-800-967-0398

MSA Mexico

Phone 01 800 672 7222

ID 4600-008-MC / March 2018

© MSA 2018 Printed in U.S.A.